



1 box = 10 pcs

- Energy saving **Meat Colour LED tube**
- **Tasteful Colour** Creation
- Original **Colour Reproduction**
- Non-toxic & Mercury-free **replacement for fluorescent tubes**
- **Shatter-resistant**
- Long Lifetime **30000h**
- Designed and **Assembled in Poland**

FOODLINE TUBE

ELECTRICAL PARAMETERS

- rated voltage 230V
- voltage frequency 50÷60Hz
- power factor >0.9
- power connection single-sided (IEC/EN 62776)

OPTICAL PARAMETERS



- chromacity PINK
- rated beam angle 120°
- housing colour WHITE RAL9010


MECHANICAL PARAMETERS

- housing material ALUMINIUM / PC
- IP protection IP20

OPERATING PARAMETERS

- energy efficiency label not applicable
- rated lifetime >30000h
- lumen maintenance factor 80%
- switching cycle >30000X
- warm-up time up 60% of the full light INSTANT FULL-LIGHT
- starting time <0.2s
- operating temperature -25°C do +45°C
- t-case maximum +60°C
- dimmable YES

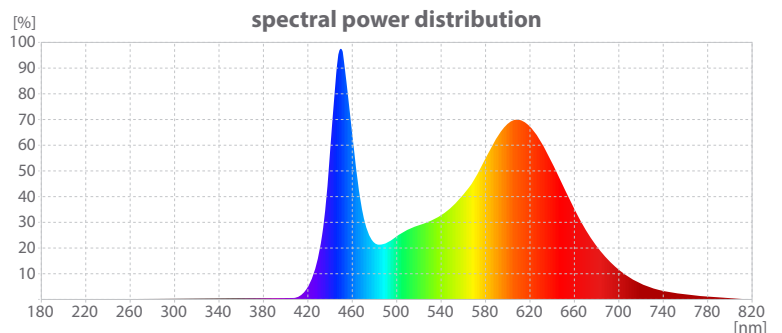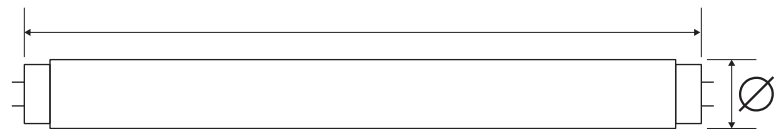



Model	EAN	Finish	Length	Diameter	Light Output	Power	Weight	Socket
FT5P5000WD	5902020153757	opal	550mm	16mm	500lm	9W	95g	G5
FT5P7500WD	5902020153764	opal	850mm	16mm	750lm	12W	145g	G5
FT5P10000WD	5902020153771	opal	1150mm	16mm	1000lm	16W	195g	G5
FT5P12500WD	5902020153788	opal	1450mm	16mm	1250lm	19W	245g	G5
FT8P650CWD	5903240710997	transparent	600mm	26mm	650lm	9W	200g	G13
FT8P6000WD	5902020153252	opal	600mm	26mm	600lm	9W	200g	G13
FT8P1000CWD	5902020153009	transparent	900mm	26mm	1000lm	15W	300g	G13
FT8P9000WD	5902020153269	opal	900mm	26mm	900lm	15W	300g	G13
FT8P1300CWD	5902020153146	transparent	1200mm	26mm	1300lm	20W	380g	G13
FT8P11500WD	5902020153276	opal	1200mm	26mm	1150lm	20W	380g	G13
FT8P1650CWD	5902020153153	transparent	1500mm	26mm	1650lm	25W	480g	G13
FT8P15000WD	5902020153245	opal	1500mm	26mm	1500lm	25W	480g	G13

Specifications are subject to change without notice. Errors and omissions are possible. Typical given the technical parameters are statistical values, which may differ from the actual technical parameters of individual products. Use with substitute tube starter branded by LEDECCO. Special-purpose product, not suitable for room illumination and accent lighting.